


SMART SOLAR HOT WATER

Pi2R iX SMART with Wi-Fi display

More capacity, monitoring and control.

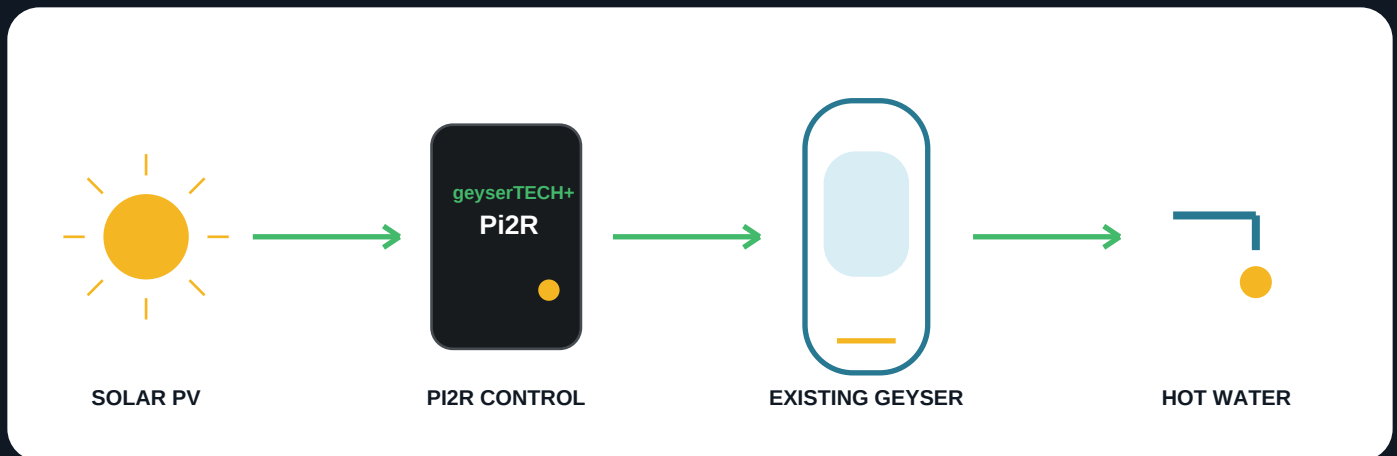

The premium CL Electrical option for larger geysers. It combines the higher-capacity Pi2R iX controller with a touchscreen Wi-Fi display for scheduling, separate solar/grid temperature settings and remote monitoring.

PROFESSIONALLY INSTALLED BY CL ELECTRICAL

Site assessment | Correct system sizing | Electrical installation | Handover

084 385 0290 | info@clelectrical.co.za | clelectrical.co.za

PI2R iX SMART WITH WI-FI DISPLAY

GEYSER SIZE

50-300 L

ELEMENT

2-4 kW

PV RANGE

90-325 Vmp
MPPT: 120-325 Vmp

CONTROL

Touchscreen + Wi-Fi

WHY THIS OPTION

- Built-in MPPT with up to 15 A stated output
- Separate AC and solar temperature settings
- Two internal AC timer functions
- Remote monitoring and control via online application

INSTALLATION SCOPE

- Pi2R iX controller
- Digital touchscreen display with Wi-Fi
- Temperature probe and communication cable
- Dedicated PV array and electrical protection
- Configuration, commissioning and user handover

BEST SUITED TO

Larger geysers, premium homes and projects needing better visibility, scheduling and remote system control.

IMPORTANT DESIGN NOTES

Final suitability, PV panel quantity and protection depend on the geyser, element rating, selected module electrical data, roof conditions and site assessment. Install to the current GeyserTECH+ instructions, product ratings and applicable electrical requirements.

Request a quotation: 084 385 0290 | info@clelectrical.co.za